

Patent

Powerful Light

Professional Lamp

High CRI

Stepless Dimming

Dmx Control

Waterproof

All Weather

Soft Light-Diffusion

Safety

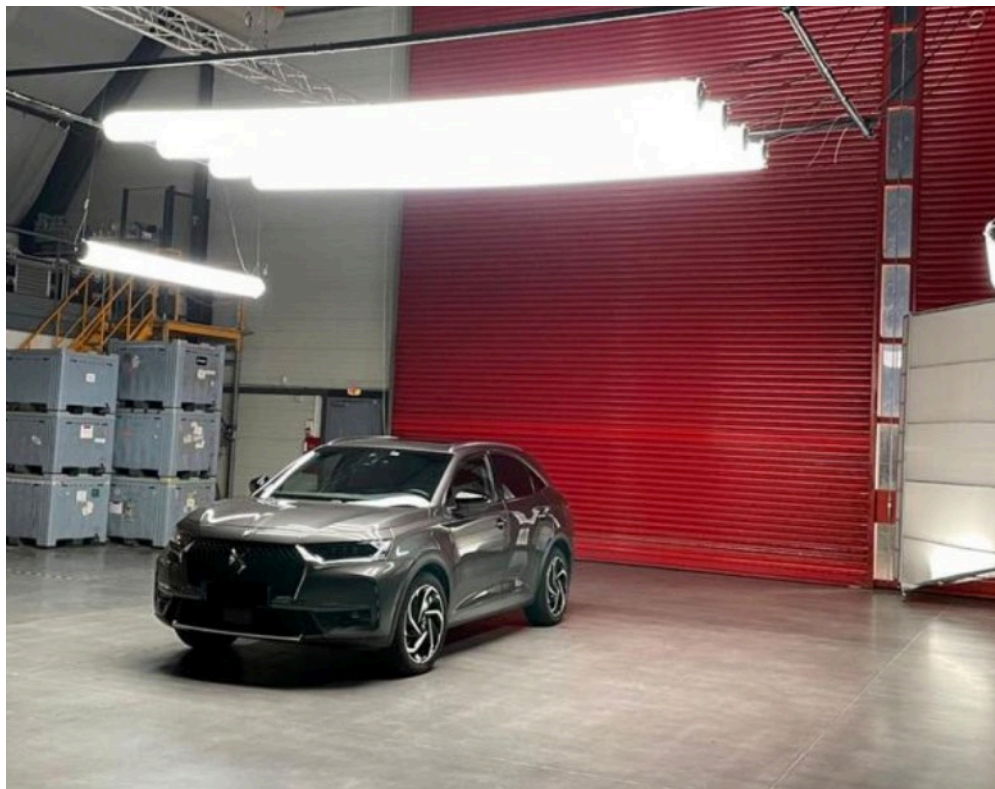




Airtube Bi14TD - 4ft

Power	100W LED
TLCI	98
Balloon Size: cm	125X22X22cm 4ft
Gross Weight:	9.5 kg
Package	52X42X23cm
Color :	Bicolor

No	Color Range	LUX@ 0.5m	LUX@ 1m	LUX@ 2m
1	2700K	3400	1104	346
2	3200K	4430	1468	448
3	5600K	4970	1728	501
4	6500K	4300	1435	446

Airtube Bi18TD - 8ft

Power	150W LED
TLCI	98
Balloon Size: cm	250X22X22cm 8ft
Gross Weight:	10 kg
Package	52X42X23cm
Color:	Bicolor

No	Color Range	LUX@ 0.5m	LUX@ 1m	LUX@ 2m
1	2700K	3690	1546	589
2	3200K	4640	1947	695
3	5600K	5150	2220	823
4	6500K	4730	2060	713

Airpillow Bi24TD - 4X2 Ft





Power	150W LED
TLCI	98
Balloon Size: cm ft	125X65X20cm 4X2ft
Gross Weight:	12 kg
Package	60X44X24cm
Color: Option	Bicolor

No	Color Range	LUX@ 0.5m	LUX@ 1m	LUX@ 2m
1	2700K	7580	2910	849
2	3200K	9150	3590	1028
3	5600K	10380	4320	1175
4	6500K	9700	3950	1077

AirBed Bi48TD - 8X4 FT

Power	1100W LED
TLCI	98
Balloon Size: cm ft	240X120X23cm 8ftx4ft
Gross Weight:	30 kg
Package	82X53X32cm
Color(option):	Bicolor

No	Color Range	LUX@ 0.5m	LUX@ 1m	LUX@ 2m
1	2700K	19700	10900	4540
2	3200K	17800	10220	4150
3	5600K	26600	14410	6110
4	6500K	28000	15630	6130

Name	Model	AirBed Bi48TD	Airpillow Bi24TD	Airtube Bi14TD	Airtube Bi18TD
					
Led Lighting	Lighting Unit				
	Lighting Source	BiColor LED	BiColor LED	BiColor LED	BiColor LED
	Joint Standard	LP20-3	LP16-4	LP16-4	LP16-4
	Color Temperature	2700k-6500K	2700k-6500K	2700k-6500K	2700k-6500K
	Light meter parameters	1m f16.5 2m f11.5 3m f8	0.5m f11 1m f8 2m f5.6	0.5m f8.05 1m f5.62 2m f2.88	0.5m f8.08 1m f5.67 2m f4.06
		iso 800 shutter 1/50	iso 800 shutter 1/50	iso 800 shutter 1/50	iso 800 shutter 1/50
	Power	1100W	150W	100W	150W
	Max Power	2200W	300W	200W	300W
	CRI/TLCI	98	98	98	98
	Waterproof	IP 67	IP 67	IP 67	IP 67
	Can be Folded	Yes	Yes	Yes	Yes

Model		AirBed Bi48TD	Airpillow Bi24TD	Airtube Bi14TD	Airtube Bi18TD
Balloon	Dimension	240X120X23cm	125X65X20cm	125X22X22cm	250X22X22cm
	Weight	3.5 kg	920 g	667g	1170g
	Material	PU Coated	PU Coated	PU Coated	PU Coated
	Thickness	0.2mm	0.2mm	0.2mm	0.2mm
	Light & Balloon	One Unit	One Unit	One Unit	One Unit
	Air Valve	65mm dia 50mm high	65mm dia 50mm high	65mm dia 50mm high	65mm dia 50mm high
	Side Skirts	Support	Support	Support	Support
	Grids	Including	Including	Including	Including
	Airtight	7 Days	7 Days	7 Days	7 Days
	Working Temperature	- 10 to 40 degree	- 10 to 40 degree	- 10 to 40 degree	- 10 to 40 degree

Model		AirBed Bi48TD	Airpillow Bi24TD	Airtube Bi14TD	Airtube Bi18TD
Control Unit	Dimension	33X23.5X10cm	23.5X16X6.5cm	21.5X16X6.5cm	21.5X16X6.5cm
	Material	Aviation aluminum	Aviation aluminum	Aviation aluminum	Aviation aluminum
	Weight	1530g	1530 g	1485g	1487g
	Stepless Dimming	0-100%	0-100%	0-100%	0-100%
	Touch Screen	No	No	No	No
	Support RC-3T 2.4G Wifi	No	No	No	No
	Control Model	Dmx 512 Wifi Dmx 512	Dmx 512 Wifi Dmx 512	Dmx 512 Wifi Dmx 512	Dmx 512 Wifi Dmx 512
	Cable Lenth	7m	7m	7m	7m
	Cable Spec	3X4mm	3X1.5mm	3X1.5mm	3X1.5mm
	Cable Connection	LP16-4	LP16-4	LP16-4	LP16-4
Power Supply	Input Voltage	AC: 110-220V	AC:110-220V/	AC:110-220V/	AC:110-220V/
			DC:16.5V	DC:16.5	DC:16.5V
	Length	3 m	3 m	3 m	3 m

Model		AirBed Bi48TD	Airpillow Bi24TD	Airtube Bi14TD	Airtube Bi18TD
Tripod Stand		1k Pin	1k Pin	1k Pin	1k Pin
Safety Case	Material	Industry Plastic	Industry Plastic	Industry Plastic	Industry Plastic
	Dimension external	82X53X32cm	60X44X24cm	52X42X23cm	52X42X23cm
	Dimension Internal	74X46X28	54X38X21cm	48X35X20cm	48X35X20cm
	Weight	11 kg	5 kg	4.5 kg	4.5 kg
Packing &	Total Dimension	82X53X32cm	60X44X24cm	52X42X23cm	52X42X23cm
Weight	Total Weight	29 kg	12 kg	9.5 kg	10 kg
Warrant	12 month	12 month	12 month	12 month	12 month

Airtube RG14C- 4ft

Power	110W LED
TLCI	98
Balloon Size: cm	125X22X22cm 1X4ft
Gross Weight:	9.5 kg
Package	52X42X23cm
Color :	Bicolor + RGB

Airtube RG18C- 8ft

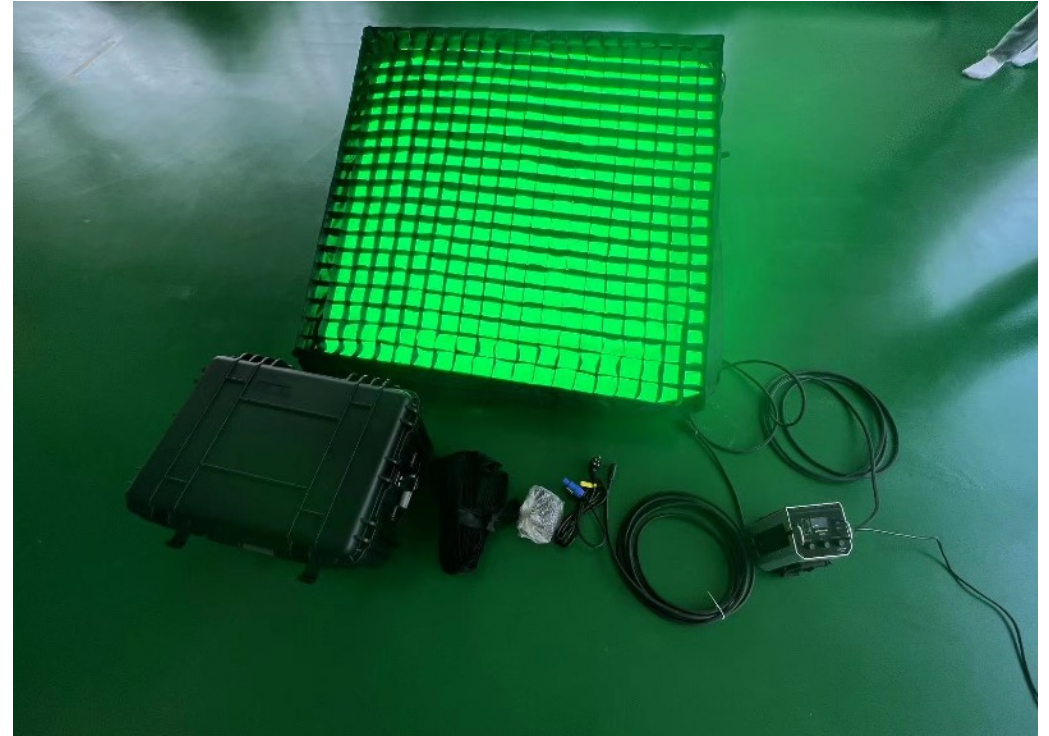
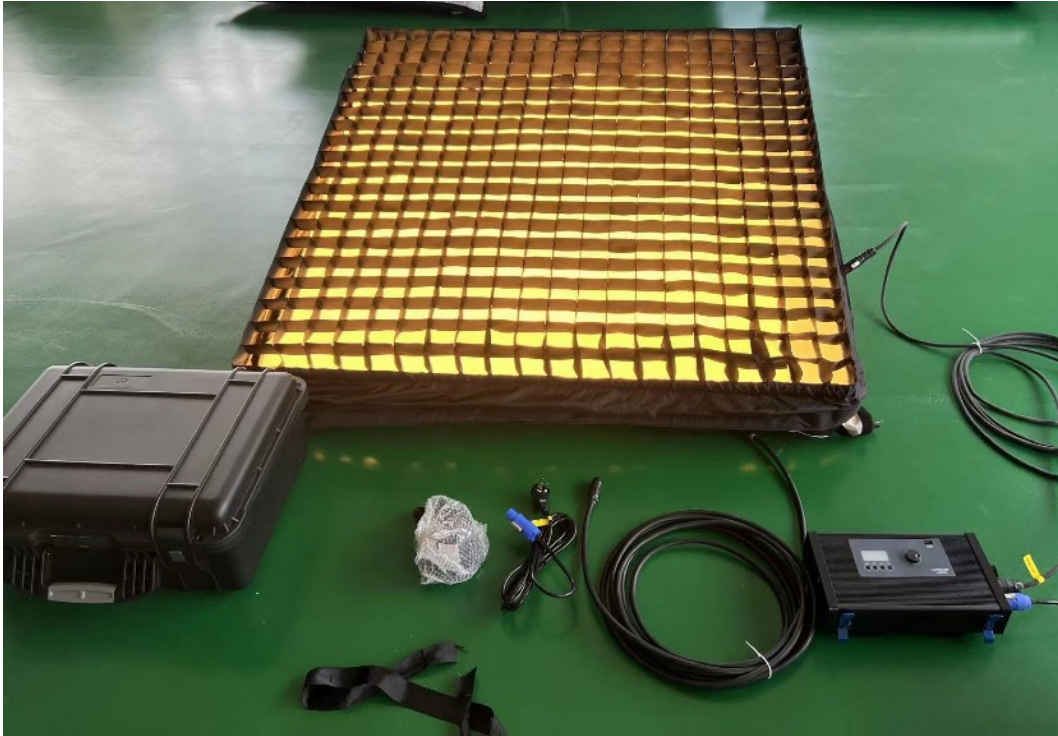
Power	180W LED
TLCI	98
Balloon Size: cm	250X22X22cm 1X8ft
Gross Weight:	10 kg
Package	52X42X23cm
Color :	Bicolor + RGB

Airpillow RG24C - 4ft

Power	180W LED
TLCI	98
Balloon Size: cm	125X65X20cm 4X2ft
Gross Weight:	10 kg
Package	52X42X23cm
Color :	Bicolor + RGB

Airpanel RG22C

Power	180W LED
TLCI	98
Balloon Size: cm	65X65X20cm 2X2ft
Gross Weight:	10 kg
Package	52X42X23cm
Color :	Bicolor + RGB

Airpanel RG44C

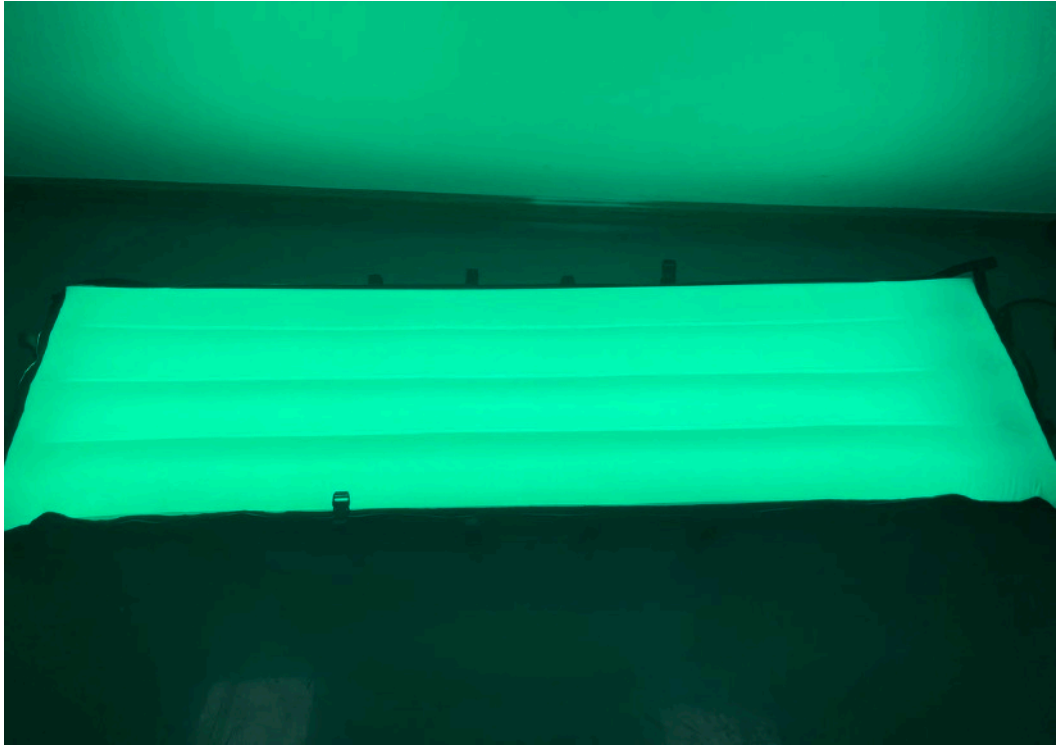
Power	450W LED
TLCI	98
Balloon Size: cm	125X125X20cm 4x4ft
Gross Weight:	12 kg
Package	60X44X24cm
Color :	Bicolor + RGB

LED Light

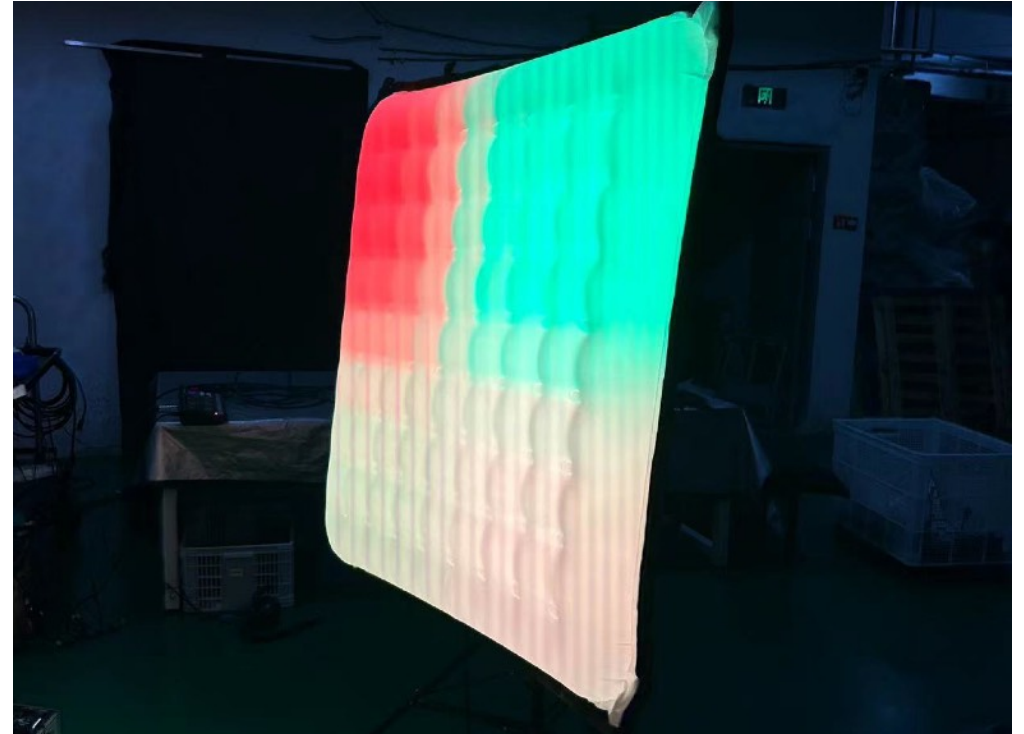
New RGB

TCH





Airwide RG36C



Power	450W LED
TLCI	98
Balloon Size: cm	90X180cm 3x6ft
Gross Weight:	12 kg
Package	60X44X24cm
Color :	Bicolor + RGB

Airpanel RG48C

Power	1100W LED
TLCI	98
Balloon Size: cm	240X120cm 8x4ft
Gross Weight:	30 kg
Package	82X53X32cm
Color :	Bicolor + RGB Pixel

Model	AirPillow RG24C	Airtube RG14C	Airtube RG18C	Airpanel RG22C
Image				
Lighting				
Lighting Source	BiColor +RGB LED	BiColor +RGB LED	BiColor +RGB LED	BiColor +RGB LED
Joint Standard	LP16-7	LP16-8	LP16-7	LP16-7
Color Temperature	2500-20000K	2500-20000K	2500-20000K	2500-20000K
Lumen:	0.5m:10400L 1m:4420L 2m:1190L	0.5m:5070L 1m:1760L 2m:531L	0.5m:5250L 1m:2320L 2m:850L	0.5m:3980L 1m:1280L 2m:380L
Light meter parameters	0.5m f11 1m f8 2m f5.6	0.5m f8.05 1m f5.62 2m f2.88	0.5m f8.08 1m f5.67 2m f4.06	0.5m f8.08 1m f5.67 2m f4.06
	iso 800 shutter 1/50	iso 800 shutter 1/50	iso 800 shutter 1/50	iso 800 shutter 1/50
Power	180W	110W	180W	180W
Max Power				
CRI/TLCI	98	98	98	98
Waterproof	IP 67	IP 67	IP 67	IP 67
Can be Folded	Yes	Yes	Yes	Yes

Balloon				
Dimension	125X65X20cm	125X22X22cm	250X22X22cm	65X65X20 cm
Weight	1175 g	860 g	943 g	960 g
Material	PU Coated	PU Coated	PU Coated	PU Coated
Thickness	0.2mm	0.2mm	0.2mm	0.2mm
Air Valve	65mm dia 50mm high	65mm dia 50mm high	65mm dia 50mm high	65mm dia 50mm high
Side Skirts	Support	Support	Support	Support
Grids	Including	Including	Including	Including
Airtight	7 Days	7 Days	7 Days	7 Days
Working Temperature	- 10 to 40 degree	- 10 to 40 degree	- 10 to 40 degree	- 10 to 40 degree
Controller Unit				
Dimension	27X16X6.5cm	27X16X6.5cm	27X16X6.5cm	27X16X6.5cm
Material	Aviation aluminum	Aviation aluminum	Aviation aluminum	Aviation aluminum
Weight	1530 g	1485g	1530 g	1530 g
Cable Spec	3X1.5mm	3X1.5mm	3X1.5mm	3X1.5mm
Cable Lenth	7m	7m	7m	7m
Cable Connection	LP16-4	LP16-4	LP16-4	LP16-4
Touch Screen	No	No	No	No
Support	Dmx 512 Wifi Dmx512	Dmx 512 Wifi Dmx512	Dmx 512 Wifi Dmx512	Dmx 512 Wifi Dmx512

Control Function				
Dxm Mode	Dmx 512 Wifi Dmx 512	Dmx 512 Wifi Dmx 512	Dmx 512 Wifi Dmx 512	Dmx 512 Wifi Dmx 512
Dim Curve	Yes	Yes	Yes	Yes
Language	English Chinese	English Chinese	English Chinese	English Chinese
Fan Set	Yes	Yes	Yes	Yes
Lighting Mode				
CCT Mode	Yes	Yes	Yes	Yes
HSI Mode	Yes	Yes	Yes	Yes
RGBWY Mode	Yes	Yes	Yes	Yes
GEL Mode	Yes	Yes	Yes	Yes
CY Mode	Yes	Yes	Yes	Yes
FX Mode	Yes	Yes	Yes	Yes
Stepless Dimming	0-100%	0-100%	0-100%	0-100%
Power Supply				
Input Voltage	AC:110-220V/	AC:110-220V/	AC:110-220V/	AC:110-220V/
Length	3 m	3 m	3 m	3 m
V-Battery Connect	DC:16.5V	DC:16.5	DC:16.5V	DC:16.5V

Tripod Stand				
Connection	1k Pin	1k Pin	1k Pin	1k Pin
Safety Case				
Material	Industry Plastic	Industry Plastic	Industry Plastic	Industry Plastic
Dimension external	52X42X23cm	52X42X23cm	52X42X23cm	52X42X23cm
Dimension Internal	48X35X20cm	48X35X20cm	48X35X20cm	48X35X20cm
Weight	4.5 kg	4.5 kg	4.5 kg	4.5 kg
Packing & Weight				
Total Dimension	60X44X24cm	52X42X23cm	52X42X23cm	52X42X23cm
Total Weight	12 kg	9.5 kg	10 kg	10 kg
Warrant				
12 month	12 month	12 month	12 month	12 month

Welcome to customize your balloon & brand

Tichuan International Co.,Ltd

Website: <https://www.ti-chuan.com>

<https://www.tch-offical.com>

Email: contact@ti-chuan.com.cn

Mobile:0086 18626302806

Address: No.29-2 Luou Road,Hudai Industry Park,
Binhu District,Wuxi city 214126

Online:

Skype: forestchina1983

QQ: 718782827

Mobile: 0086 18626302806

Technical Support:

support@ti-chuan.com

